

# H306 Handheld Airborne Particle Counter

## 0.1 CFM (2.83 LPM)

- Industry's highest concentration of 15,000,000 particles/ft<sup>3</sup> @ 10% coincidence loss
- Ideal for use in research, industrial health and safety, indoor air quality, and cleanroom applications
- >10 hours continuous operation on a fully charged battery
- Industry's first Sleep Mode and Power Conservation Mode with Intelligent Battery
- The most comprehensive internal self-diagnostics of any handheld particle counter
- Internet of Things (IoT) communication allows for network or cloud-based data options



The Airy Technology® H306 Handheld Particle Counter measures 0.3 to 25.0 µm with a flow rate of 0.1 CFM (2.83 LPM). Easy to configure, this instrument displays up to 6 user-selectable size channels as well as optional temperature and relative humidity. View data on screen or via printer, real time through its versatile output options, or export to Instrument Management Software (IMS). Airy Technology® counters can be controlled and monitored remotely via web browser.


All Airy Technology® counters meet ISO 21501-4 and JIS B9921. The H306 ensures compliance with an on-board pulse height analyzer.

### Features and Benefits

- Measures 0.3 to 25.0 µm
- 0.1 CFM (2.83 LPM) flow rate
- Long life laser diode technology
- Measures up to 6 channels of simultaneous data
- Integrated handle for one-handed operation
- Large easy-to-use icon driven color touch screen display
- Optional temperature and relative humidity probe available
- Stores up to 45,000 sample records and 1,000 sample locations
- Remote diagnostics allows for remote service investigation through the Internet
- Easy configuration and transferable from instrument to instrument
- Connect using Ethernet, USB or (optional) Wireless 802.11 b/g, RS 485, or RS232
- Internal audible alarm with comprehensive alarm management
- User-selectable channel sizes
- Complies with ISO 21501-4 just locajust locationsand JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Seamless integration into a facility monitoring system
- Lightweight high-impact injection molded plastic enclosure
- 1 year limited warranty. Extended warranties available.

# Specifications


<b>Model</b>	<b>H306</b>
Size Range	0.3 to 25 µm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 µm variable binning
Flow rate	0.1 CFM (2.83 LPM)
Concentration Limit	15,000,000 Particles/ft <sup>3</sup> @ 10% coincidence loss
Battery Run Time	>10 hours continuous operation
Light Source	Long life laser diode
Counting Efficiency	50% @ 0.3 µm; 100% for particles >0.45 µm per JIS
Zero Count	<1 count / 60 minutes (<1 particles / 6 ft <sup>3</sup> )
Count Modes	Cumulative/differential, count, count/m <sup>3</sup> , and count/ft <sup>3</sup>
Count Alarms	1 to 9,999,999 counts
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480x272) color touch screen
Printer	(Optional) External thermal printer
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable built-in alarm
Battery	Removable Li-ion
Battery Recharge Time	4 hours within instrument (<2 hours with external battery charger)
Communication Modes	Ethernet and USB. (Optional) Wireless 802.11 b/g, RS485 or RS232.
Environmental Sensor Alarm	(Optional) Temp and RH probe 32° to 122°F (0° to 50°C) ±1°F (0.5°C), 15-90% ±2% relative humidity
Standards	Alarms on counts for all particle sizes, low battery, sensor failure, environmental sensors and flow ISO 21501-4 and JIS B9921
Instrument Calibration	Recommended minimum once per year
External Surface	High impact injection molded plastic
Dimensions (L x W x H)	5.12" x 4.25" x 12.26" (13.0 cm x 10.8 cm x 31.1 cm) includes handle and does not include probes 2.2 lb (1.0 kg)
Weight	
Accessories	Operating manual and IMS software on USB flash drive, isokinetic probe, filter, battery, data download software, USB cable, power supply and cable
Optional Accessories	Printed manual, carrying case, spare battery, external battery charger, external printer, isokinetic probes, temperature relative humidity sensor, barbed fittings, IMS-RT monitoring system
Buffer Memory	45,000 sample records (rotating buffer) including particle count data, environmental data, locations, and times. Scrollable on screen or printout.
Sample Locations	Up to 1,000 locations 20 characters long
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing
Warranty	1 year limited warranty. Extended warranties available.

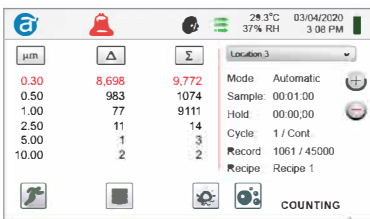




Audible and Visual Alarm Management



Icon Driven Menus for Ease-of-Use

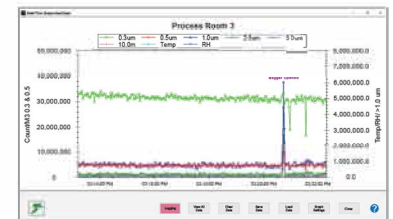

Control and Manage Remotely with IMS



PAT. <https://particlepatents.com/> Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice. Contact [hello@particlesplus.com](mailto:hello@particlesplus.com) or your local distributor for more details. Airy Technology and the Airy technology logo are trademarks of Particles Plus, Inc. ©2020 Particles Plus, Inc. All rights reserved.

REV 20200601-H306



31 Tosca Drive  
Stoughton, MA 02072 U.S.A.  
+1-781-341-6898  
[www.airytechnology.com](http://www.airytechnology.com)