

# R5300-AQM-1 and R5300-AQM-2 Air Quality Monitors

## PM, CO<sub>2</sub>, Temperature, RH, and TVOC



The Airy Technology® R5300-AQM1 and R5300-AQM2 Air Quality Monitors measure particles from 0.3 to 25.0 µm. These user-friendly instruments display up to six particle size channels, temperature, relative humidity, and CO2 (AQM1) or CO2 + TVOC (AQM2). Featuring a 1.2 LPM flow rate, the R5300 is optimized for high-concentration environments providing improved accuracy, reduced coincidence loss, and extended instrument lifespan in comparison to higher-flow models.

Designed for research, industrial hygiene, indoor air quality, and cleanroom applications, the R5000 Series offers exceptional versatility. From the cleanest labs to the dirtiest worksites, confidently monitor any environment thanks to the industry's highest particle concentration limits.

One of the key advantages of the R5000 Series as a remote air quality monitor is its built-in touchscreen display. It provides real-time visual feedback for technicians working in critical areas, enabling immediate identification of elevated particle counts. Adjustable audible alarms offer an additional layer of awareness in critical environments.

Data can be managed directly on the device, through a facility monitoring system or through the free Airy Technology® software. Export raw data in .CSV format or generate compliant reports (ISO 14644-1, EU GMP Annex 1, or FS 209E). Remote diagnostics are also available from anywhere with an internet connection. The R5000 Series can function as a fully portable, battery-operated solution or be easily integrated into building automation and cleanroom management systems with multiple communication options.


### Features and Benefits

- Stores up to 45,000 sample records, 1,000 sample locations and 50 recipes
- Long life laser diode technology for reliable performance
- Approximates mass concentration in µg/m³ with density and refractive index corrections
- User selectable PM sizes from 0.3 or 0.5 µm to 10 µm including TPM of up to 25.0 µm
- Large, intuitive color touch screen display with an easy-to-use icon-driven interface
- Temperature and relative humidity probe included
- Resolve issues quickly from any location with internet-enabled remote diagnostics
- Annotation function allows user to save 32 character notations to a live sample record
- Common interface ensures ease of use across all products
- Connect using Ethernet, USB, Wi-Fi (optional), RS 485 or RS232
- Displays user-definable reports for ISO 14644-1, EU GMP Annex 1 and FS 209E
- Built-in visual and audible alarms with comprehensive alarm management
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean, lightweight stainless steel enclosure with minimal particle traps
- Versatile mounting options
- 2 year Limited Warranty (Extended and Lifetime warranties available)


## Specifications

<b>Model</b>	<b>5300-AQM1 and 5300-AQM2</b>
Size Range	0.3 to 25 $\mu\text{m}$
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 $\mu\text{m}$ variable binning
Flow rates / Accuracy	1.2 LPM $\pm$ 3%
Concentration Limits	27,000,000 particles/ft <sup>3</sup> @ 10% coincidence (per ISO 21501-4), 50,000,000 particles/ft <sup>3</sup> @ 10% coincidence (as tested and validated <sup>1</sup> )
Aerosol Concentration Range	0.01 to 20,000 $\mu\text{g}/\text{m}^3$
Light Source	Long life laser diode
Resolution	0.00003 $\mu\text{g}/\text{m}^3$
Counting Efficiency	50% @ 0.5 $\mu\text{m}$ ; 100% for particles >0.75 $\mu\text{m}$ per JIS
Zero Count	<1 count / 60 minutes (<1 particles / 6 ft <sup>3</sup> ). No fault count subtraction.
Count Modes	Real-Time Meter and graph, cumulative/differential count/m <sup>3</sup> and count/ft <sup>3</sup> , and mass concentration (PM)
Count Alarms	1 to 9,999,999 counts
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480×272) color touch screen
Optional Printer	External thermal printer available
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable integrated alarm
Communication Modes	Ethernet, USB, Wireless 802.11 b/g (Optional), RS485 or RS232
Environmental Sensors (AQM1)	Includes NDIR-CO2 sensor (0-5000 ppm $\pm$ 1%, resolution 1 ppm, response rate 20 seconds), temperature (32-122°F, $\pm$ 1°F / 0-50°C, $\pm$ 0.5°C) and relative humidity probe (15-90% RH, $\pm$ 2%)
Environmental Sensors (AQM2)	Includes all sensors in the 300-AQM1 and PID-TVOC sensor (5 ppb - 50 ppm $\pm$ 1.5%, response rate <3 seconds)
Alarm	Alarms on counts for all particle sizes, low battery, sensor failure, environmental sensors and flow rate
Standards	ISO 21501-4 and JIS B9921
Instrument Calibration	Recommended minimum once per year
External Surface	Stainless steel
Dimensions (L x W x H)	5.22 x 3.81 x 9.42 in (13.3 x 9.7 x 23.9 cm) includes barb fittings
Weight	4.0 lb (1.8 kg)
Accessories	User manual + Instrument Management Software (IMS) on USB flash drive, isokinetic probe, temperature relative humidity sensor, purge filter, USB cable, and power supply
Optional Accessories	Printed manual, carrying case, external printer, barbed fittings, and sample tubing
Data Storage	45,000 sample records (rotating buffer) including particle count data, environmental data, locations, annotations, and times. Scrollable on screen or printout. Scrollable on screen or printout
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing
Warranty	2 Year Limited Warranty (Extended and Lifetime Warranties available)


1- Validated by independent analysis see paper available at [www.particlesplus.com/aac2022\\_paper](http://www.particlesplus.com/aac2022_paper)

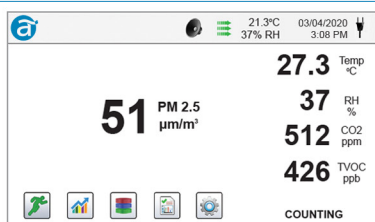




Configurable Environmental Sensor Display

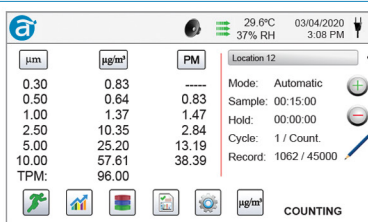

Simultaneous Display of Multiple PM Sizes

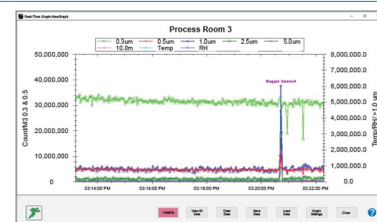

Control and Manage Remotely with IMS

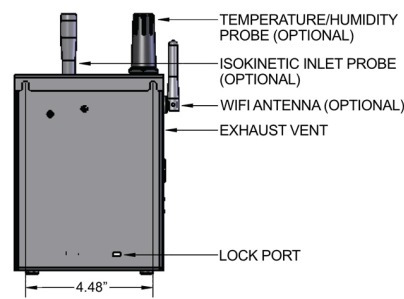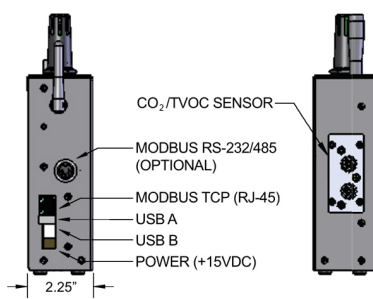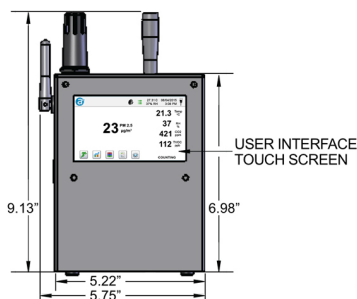

Airy Technology, Inc. reserves the right to change specifications without notice.  
Contact [www.airytechnology.com](http://www.airytechnology.com) or your local distributor for more details.  
Airy Technology and the Airy Technology logo are trademarks of Airy Technology, Inc. ©2025 Airy Technology, Inc. All rights reserved.

REV 20250827-R5300-AQM-1/AQM-2



1490 Central Street  
Stoughton, MA 02072 U.S.A.  
+1-781-341-6898  
[www.airytechnology.com](http://www.airytechnology.com)